



**MONITORING
COMPANY**

Le spécialiste du monitoring vidéo & audio

**BD-0314
MARSHALL**

Serial Digital Distribution Amplifier

Our BD-0314 Serial Digital Distribution Amplifier is a cost effective solution for a wide range of applications. This model can be used for any application requiring distribution of SDI signals. All Processing and Distribution modules include power supply and owners manual. An optional base holder (V-CB1) is available for use in desktop applications.




Front



Rear




on V-CB1 Stand

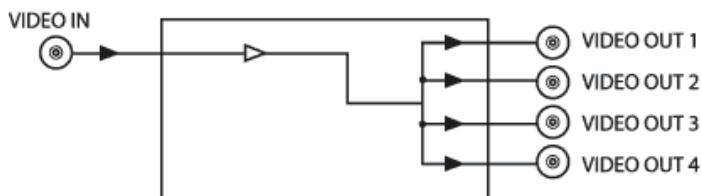

- Use for distribution of SDI signals 143Mbps to 540Mbps
- Self terminating 75Ω BNC SDI input
- 4 reclocked and equalized BNC SDI Outputs
- Power indicator on front panel
- All connections in rear of module
- Install in rack or use on the desktop
- Can also be used as a signal repeater
- Includes power supply

Specifications

Dimensions	12.1cm x 9.5cm x 2.5cm
Signal Input	BNC connection of composite video - PAL or SMPTE
Signal Output	4 BNC
Frequency Response	5 to 7 Mhz
K factor	<1%
Signal to Noise	>60 db
Differential gain/phase	<1% / <1°
Cable length	600' max using Belden 8281 or equivalent
Power required	6 V D.C. supplied from external power supply (Included)
Weight	0.24kg

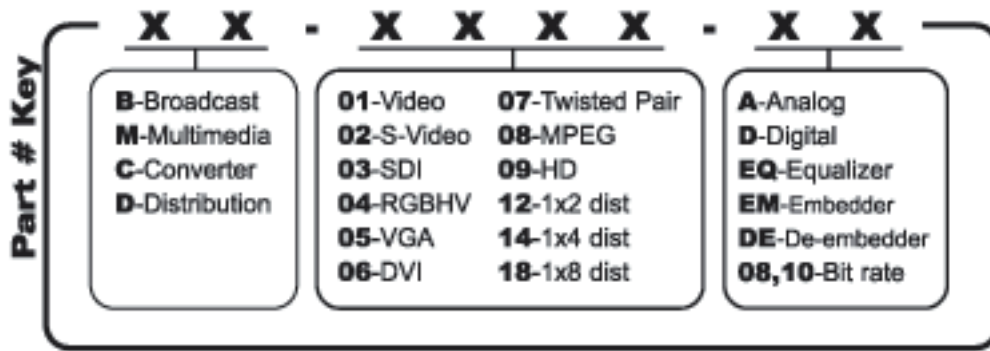

Monitoring Company au SATIS



Tél. : +33 (0)4 93 67 47 60 - Fax : +33 (0)4 93 61 59 31
 ventes@monitoring-company.fr
www.monitoring-company.fr